


APPLICATION DATA – Model: ClearFire® CE | Fuel Series: 700 | Design Pressure: 125 psi Hot Water | System Voltage: 115/1/60 | NOx Emissions Level: ≤20ppm | Elevation: 700 ft ASL


Input Capacity (MBtu/hr):	DIM	500	750	1000	1500	2000	2500	3000	3500	4000	5000	6000
<b>Clearances [in.]</b>												
Burner Service Area (Top):	RED	14	14	14	14	14	14	14	14	14	18	18
Service Area (Front):	ORANGE	36	36	36	36	36	36	36	36	36	36	36
Service Area (Rear):	ORANGE*	20	20	20	20	20	20	20	20	20	20	20
Side Clearance:	MAGENTA**	3	3	3	3	3	3	3	3	3	3	3
Electrical Panel (115V)	GREEN	36	36	36	36	36	36	36	36	36	36	36

[ORANGE\*] NOTE: Boiler rear must be accessible for servicing.


[MAGENTA\*\*] NOTE: At least one side must have at least 20 in. for rear access.

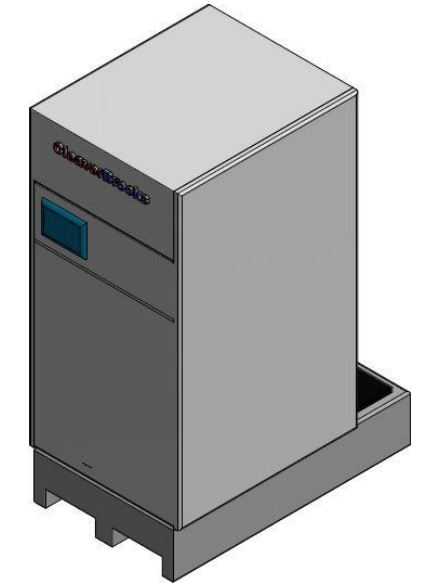

BURNER SERVICE AREA

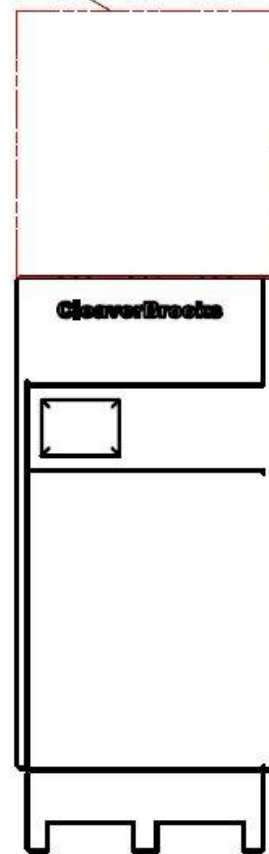

FRONT VIEW

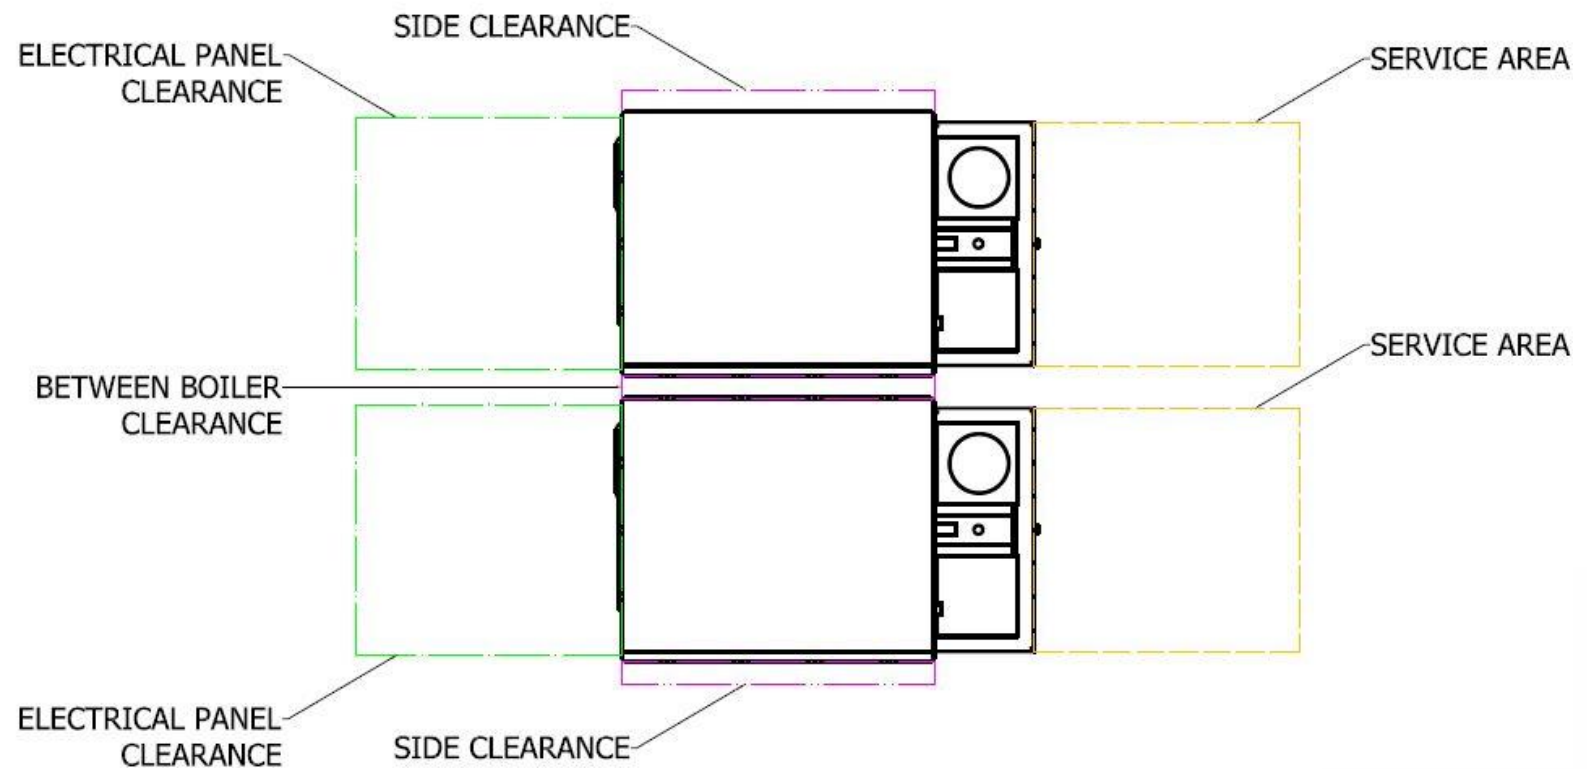

TOP VIEW

**NOTE: All dimensions are approximate. Product data may vary based on application. Contact your local Cleaver-Brooks representative for additional information.**