


APPLICATION DATA – Model: ClearFire® LC | Fuel Series: 700 | Design Pressure: 160 psi Hot Water | System Voltage: 460/3/60 | NOx Emissions Level: <20ppm | Elevation: 700 ft ASL


Input Capacity (MBtu/hr):	DIM	4,000*	5,000*	4,000**	5,000**	6,000	8,000	10,000	12,000
Clearances [in.]									
Piping (Top):	RED	36	36	36	36	36	36	36	36
Service Area (Front/Rear):	ORANGE	36	36	36	36	36	36	36	36
Side Clearance/Between Boilers:	MAGENTA	24	24	24	24	24	24	24	24
Electrical Panel (460V):	GREEN	42	42	42	42	42	42	42	42

[*] Note: New casing style released after July 2016.

[**] Note: Older casing style.

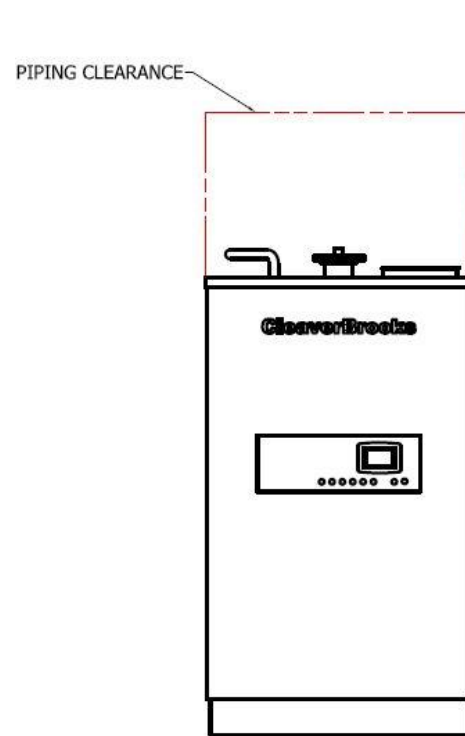

FRONT VIEW

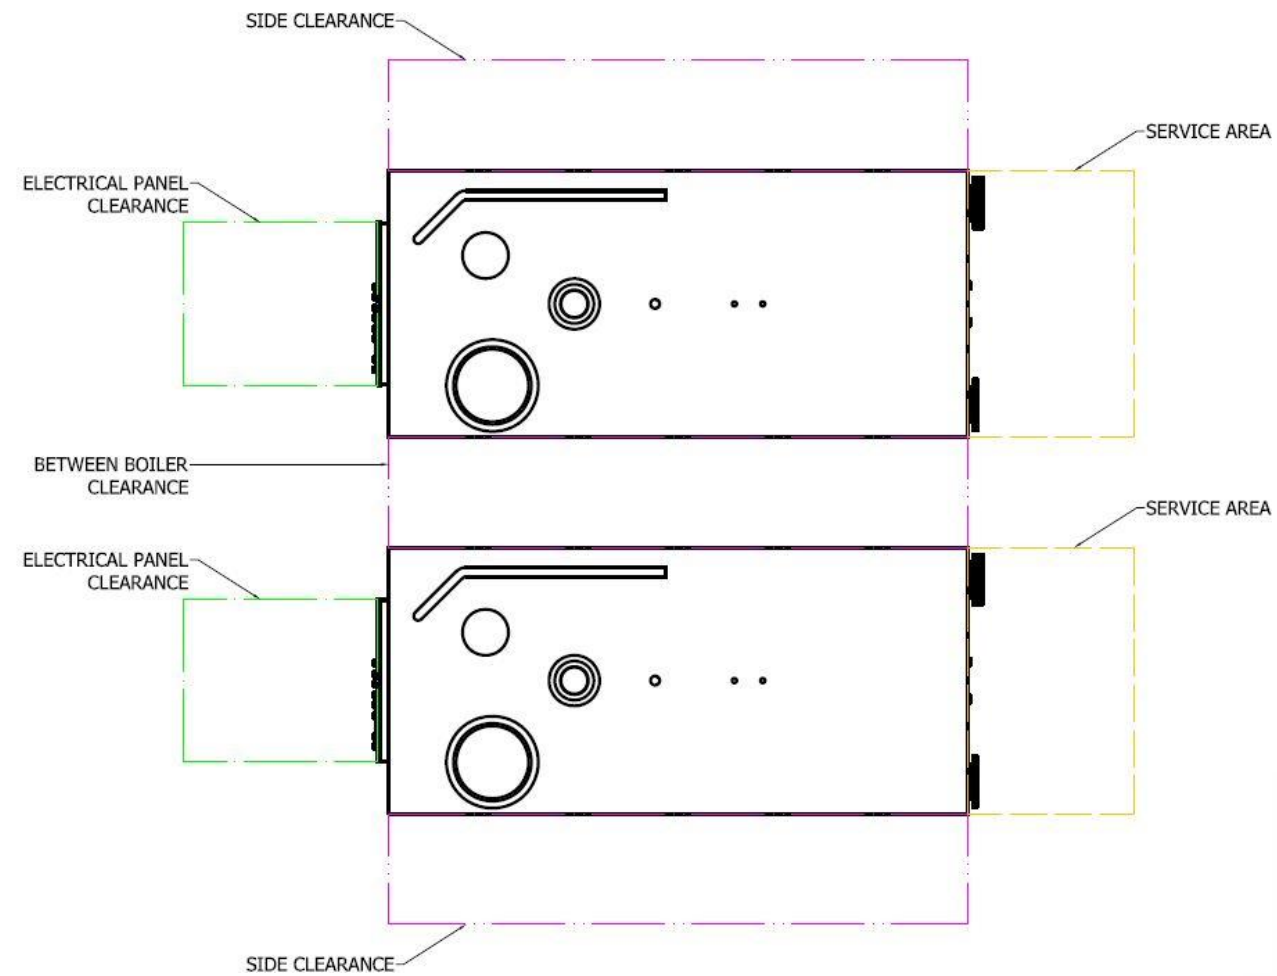

TOP VIEW

NOTE: All dimensions are approximate. Product data may vary based on application. Contact your local Cleaver-Brooks representative for additional information.